

BWT besthead




The Innovator

FILTER HEAD WITH VERSATILE CONNECTION TECHNOLOGY

The new BWT besthead FLEX filter head fits all BWT water+more filter cartridges, making it very simple to optimise water at the point of use. The filter head's **user-friendly** venting is extraordinarily simple to operate, while the bypass control that snaps into place ensures the right setting is made. With its one-of-a-kind **FLEX Insert interface**, no tools are required to integrate water filters with matching connecting hoses into existing supply line systems. FLEX Insert attachments in various formats can be used, thanks to the socket that is adjustable in 30° steps. This ensures the **space-saving installation** of filters and safe supply line routing with no kinks.

BWT besthead FLEX features two DVGW-compliant backflow prevention devices. These stop water from flowing back into the drinking water pipeline or filter cartridge while also preventing any accidental leaks. Both the filter head and its accessories are pressure-resistant and safe. Made from **food-grade materials**, they can be utilised in any drinking water system worldwide.

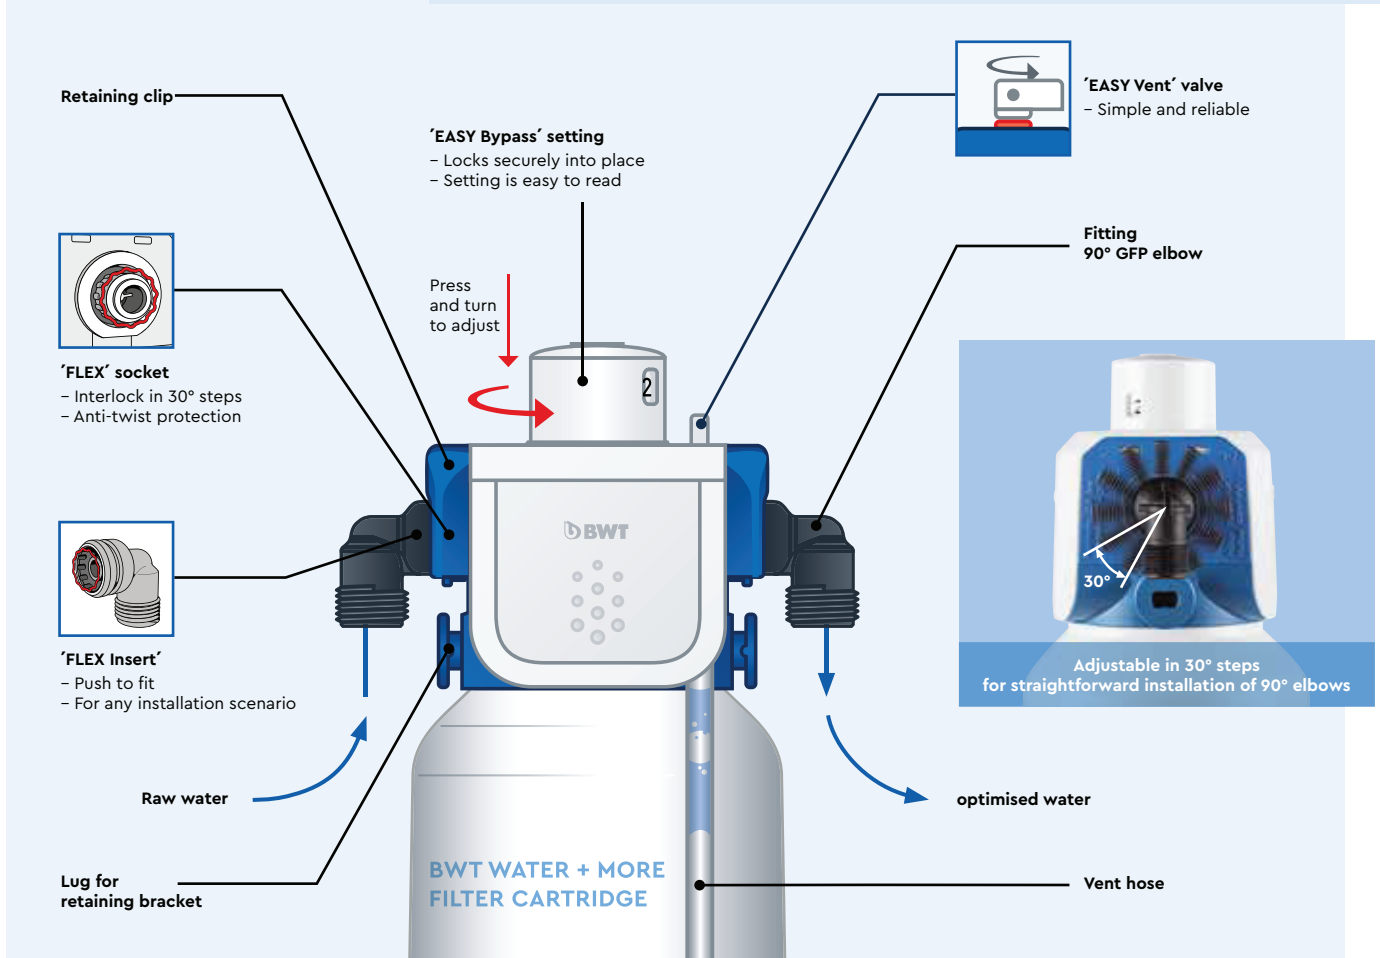



TECHNICAL DATA

Dimensions	
Width in mm	125
Height in mm	105
filter head order no. ⁽¹⁾	FS00Z20A00

⁽¹⁾ Supplied with 2x 90° elbow fittings, FLEX Insert with 3/8" ext. thread made from GFP. Subject to change.

OPERATING CONDITIONS

Inlet pressure:	2–8 bar
Water temperature:	4–30 °C
Ambient temperature:	4–40 °C

BWT besthead FLEX filter head with a wide choice of connection options to ensure simple, space-saving installation of BWT water+more filter cartridges.

ACCESSORIES

	Order number
Straight fitting	
Straight fitting, FLEX Insert with 3/8" ext. thread made from GFP	FS00Z21A00
Straight fitting, FLEX Insert with 1/2" ext. thread made from GFP	FS00Z22A00
Straight fitting, FLEX Insert with 3/4" ext. thread made from GFP	FS00Z23A00
Straight fitting, FLEX Insert with 8 mm John Guest connector made from GFP	FS00Z24A00
Straight fitting, FLEX Insert with 3/8" John Guest connector made from GFP	FS00Z25A00
90° elbow fittings	
90° elbow fitting, FLEX Insert with 3/8" ext. thread made from GFP	FS00Z26A00
90° elbow fitting, FLEX Insert with 1/2" ext. thread made from GFP	FS00Z27A00
90° elbow fitting, FLEX Insert with 3/4" ext. thread made from GFP	FS00Z28A00
90° elbow fitting, FLEX Insert with 6 mm John Guest connector made from GFP	FS00Z41A00
90° elbow fitting, FLEX Insert with 8 mm John Guest connector made from GFP	FS00Z29A00
90° elbow fitting, FLEX Insert with 3/4" John Guest connector made from GFP	FS00Z42A00
Connecting hoses with straight connection	
Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, union nut with 3/8" int. thread	FS00Z36A00
Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, union nut with 1/2" int. thread	FS00Z37A00
Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, union nut with 3/4" int. thread	FS00Z38A00
Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, 90° elbow with 3/4" int. thread	125252207
Connecting hoses with 90° connection	
Connecting hose DN 8, 1.5 m, 90° elbow FLEX Insert made from GFP, union nut with 3/8" int. thread	FS00Z32A00
Connecting hose DN 8, 1.5 m, 90° elbow FLEX Insert made from GFP, union nut with 1/2" int. thread	FS00Z33A00
Connecting hose DN 8, 1.5 m, 90° elbow FLEX Insert made from GFP, union nut with 3/4" int. thread	FS00Z34A00
Connecting hose DN 8, 1.5 m, with ball valve, 90° elbow FLEX Insert made from GFP, union nut with 3/8" int. thread	FS00Z35A00
Connectors	
Tee, 2x FLEX Connector, 1x FLEX Insert, made from GFP	FS00Z40A00
Mounting brackets	
Retaining bracket for under-sink mounting	FS00Y66A00
Extension to retaining bracket for wall-mounting 2XL size filter cartridges	FS00Y73A00
BWT besthead FLEX – Set 1	
– BWT besthead FLEX with 2x 90° elbow fittings, FLEX Insert with 3/8" ext. thread made from GFP	FS00Z39A00
– Connecting hose DN 8, 1.5 m, with ball valve, 90° elbow FLEX Insert made from GFP, union nut with 3/8" int. thread	
– Straight fitting, FLEX Insert with 3/8" ext. thread made from GFP	
– Reduction FM 3/4" x M 3/8" made from GFP	